

BOARD + BATTEN

PRODUCT DATA SHEET

- Comes cut in 10' and 13'
- Available in 12", 16" and 20" reveal
- Triple Coated Textured Steel


Attributes

- Beautiful and durable long-lasting exterior solution
- Luxurious, high performance textured steel siding
- Fireproof and water resistant
- Low maintenance — requires no painting after installation
- Remarkably strong
- 40-year warranty
- 100% recyclable




12" Board

10' Length - 191100
13' Length - 191200
Custom - 191120

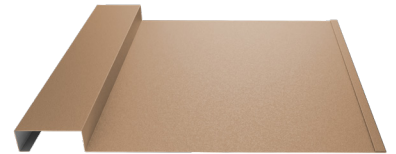

16" Board

10' Length - 191150
13' Length - 191250
Custom - 191160

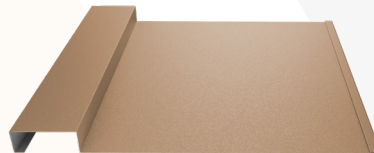

20" Board

10' Length - 191175
13' Length - 191275
Custom - 191180



ARMOUR SIDE PRODUCTS OFFER NUMEROUS BENEFITS AND ADVANTAGES OVER THE COMPETITION, SUCH AS:

Maintenance

Simply rinse with a garden hose twice a year.

Durability

Armour Side products are created out of triple coated SMP (Silicone Modified Polyester) paint on 28 Gauge Galvalume Steel, meaning you have a high grade of corrosion-resistant coating on an extremely robust steel. It includes a 40 Year Pro-Rated Finish Warranty.

Fire Resistance

Armour Side is made from steel, so it is non-combustible and has a Class A Fire Rating. That means no melting, cracking, or steel substrate damage, even from your BBQ!

Impervious to Mold, Moisture & Insects

Steel also means it is impervious to insects & plant growth, such as moss.

Sustainable

Fiber cement, vinyl and PVC cladding are simply not environmentally friendly materials. These materials are not recyclable and will generally end their life cycle in a landfill. The Recycled Content of our steel is 5% Pre-Consumer and 15-20% Post-Consumer with the documentation information required for LEED submittals.

Product Testing

- NON-Combustibility Test (CAN/ULC S114-18)
- Surface NON-Combustibility Test (CAN/ULC S102-18)
- 750°C Tube Furnace Test (ASTM E136-16A)
- Fire Test (ULC-S135-04)
- Deformation Resistance Test (CAN/CGSB-93.4-92)
- Wind Test (ASTM E330/E330M-14)
- NRC-CNRC, Canadian Construction Materials Centre building product evaluation. Certification number: CCMC 14153-L

Colours

